

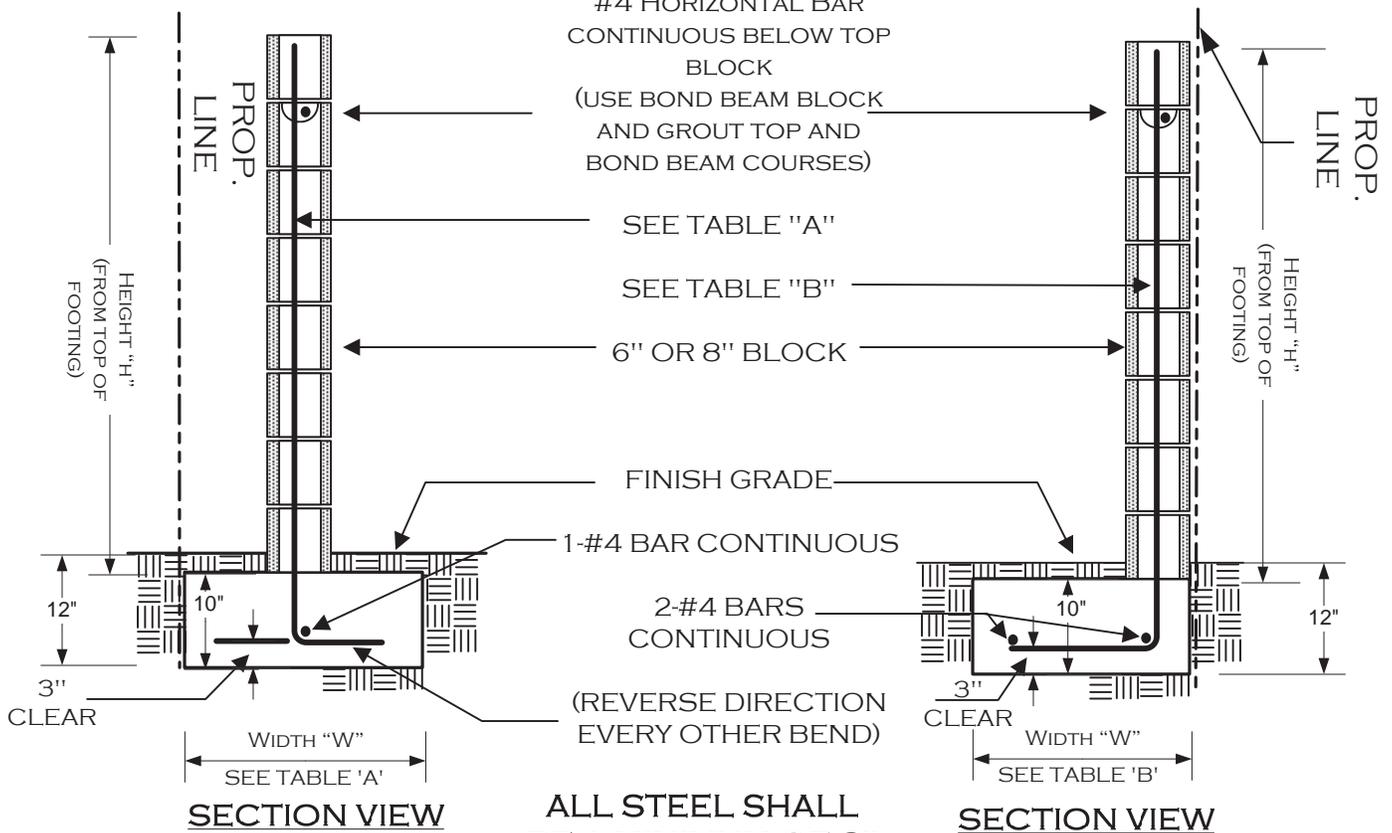
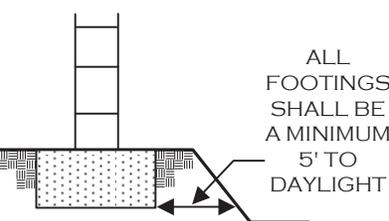


### FOOTING OPTION "A"

### FOOTING OPTION "B"

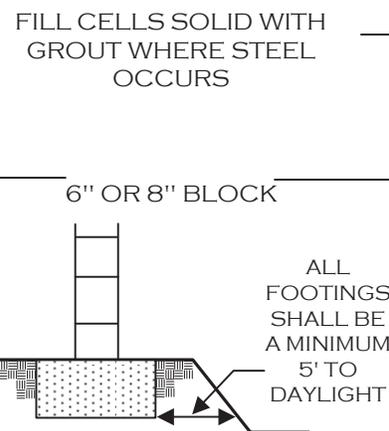

ALL STEEL SHALL BE A MINIMUM OF 3" FROM EARTH

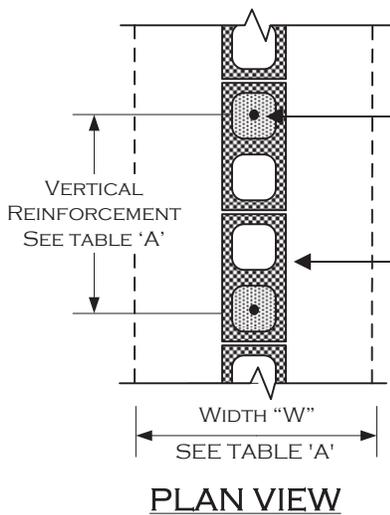

### INSPECTIONS REQUIRED:

- 1.) Foundation; Excavation, trench clean with steel in place and supported 3" above and away from the surrounding earth/dirt.
- 2.) Steel/Pre-grout; Bond beam and vertical steel inspection prior to placing grout.
- 3.) Final; After grout is place, prior to any decorative cap placement.

TABLE "A"			TABLE "B"				CITY of CHINO	
"H"	"W"	VERTICAL REINF. #4 STEEL BARS	"H"	"W"	VERTICAL REINF. #4 STEEL BARS		MASONRY WALL STANDARD	
3'	17 "	48" O.C.	3'	19 "	48" O.C.	(909) 334-3251	13220 Central Avenue, Chino, CA 91710	
4'	20 "	48" O.C.	4'	22 "	48" O.C.			
5'	23 "	48" O.C.	5'	29 "	48" O.C.	Fax (909) 334-3729	2/5/2015	
6'	29 "	24" O.C.	6'	34 "	24" O.C.			